

Contact our sales office:




## HARDWIRED

### LED Wall Mounted Smart Strobe Light

Flash Patterns to Distinguish  
Smoke, Carbon Monoxide or  
Natural Gas Danger



Model SLW127CN | Canada  
Model SLW127 | USA

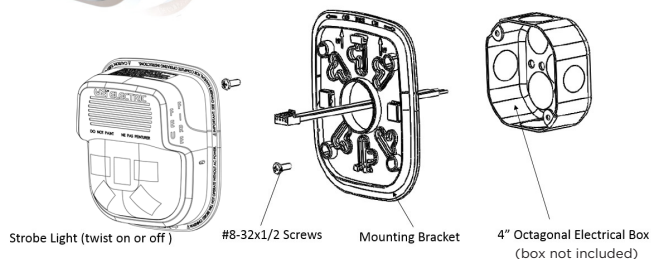

### FEATURES AND BENEFITS

- **Super Bright 177 Candela LED Strobe Light**
  - Triggered when interconnectable Smoke, Carbon Monoxide or Combination Alarms are activated
  - Strobe light level proven to alert those with hearing loss
- **Built-in Relay**
  - Eliminates the need for separate relay module purchase. Eliminates extra wiring step
- **Low Profile Design**
  - Ideal for residential applications
- **Interconnectable Up to 24 Compatible Devices**
  - 18 Initiating Devices: 12 smoke or combination alarms, 6 Carbon Monoxide Alarms
- **Quick Connect Wiring Harness**
  - Saves installation time. Longer pigtail wires are pre-stripped
- **Mounting Options - Wall Mount Only**
  - Easily adapts to standard junction boxes. Mounting screws included

### SPECIFICATIONS:

**Light Output:** 177 Candela (on axis) LED Strobe

#### Smart Strobe Flash Patterns:

- **SMOKE:** Steady Flash Every Second
- **CARBON MONOXIDE:** 4 Quick Flashes, 2 Second Pause. Repeating
- **NATURAL GAS:** Steady Flashes Every 2 Seconds

**Operating Voltage:** 100-140 VAC, 60Hz  
170mA maximum

**Warranty:** 10 Year Limited Warranty

#### Certifications

- UL1971, UL1638 and ULC-S526

**Power Source:** Hardwired, 120 Volts AC

**Temperature Range:** 40° F to 100° F  
(4.4° C to 37.8° C)

**Humidity Maximum:** 93% RH. Indoor use only

**Size:** 5.3" length x 6.1" height x 2.4" deep

**Size:** 13.35cm length x 15.5cm height x 6.2cm deep

**Weight:** 14.38 oz/0.41kg

USI strobes and alarms are designed to only be interconnected with other USI products



Conforms to  
UL 217, UL 2034  
Certified to ULC S531,  
CSA 6.19



Multiple Station  
Alarm Accessory  
Strobe Light