

Contact our sales office:



DEVICES

Combination
**USB Charger +
Tamper Resistant
Receptacle**

NOW IN STOCK




Standard-Size Color-Matched Wall Plate Included
Meets NEC and CEC Requirements
Meets UL 498 and UL 1310 Standards
Meets CSA C22.2 No. 42

15 Amp and 20 Amp Models
Color: White



MODEL SHOWN IS
USB2R2WH15A36

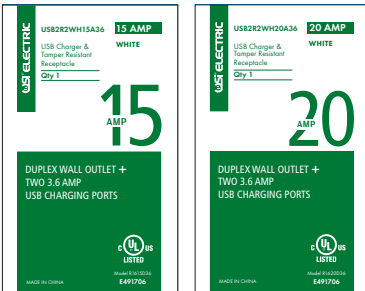

Contractor Packaging

Standard Duplex Wall Outlet +
2 Type A USB Charging Ports

FEATURES AND BENEFITS

- **Charge most compatible devices directly without an adapter**
 - USB charging ports rated 3.6 amp
- **Ideal for new or replacement installations**
 - Replaces a standard single or duplex receptacle
- **Quick & easy charging of compatible devices (Type A)**
 - iPod®, iPhone®, iPad® mobile phones, tablets, GPS, digital cameras, E-Readers, Bluetooth®, headsets, etc.
- **Tamper-resistant receptacle**
 - Restricts access to single-prong foreign objects
- **Auto shut down USB port**
 - If combined devices exceed 3.6 amps power capacity
- **Backwire and sidewire compatible**
 - 15 amp models: #14 AWG solid, or stranded copper wire — sidewire and backwire
 - 20 amp models: #12 AWG or #14AWG solid, or stranded copper wire — sidewire and backwire
- **Tri-drive wiring screws**
 - Backed out and staked
- **Captive screws**
 - For wall plate and device
- **2-year limited warranty**

SPECIFICATIONS

- 2-Pole, 3-wire grounding
- 15 amp: 125V AC, 5V DC, 3.6 amp charging
- 20 amp: 125V AC, 5V DC, 3.6 amp charging
- NEMA 5-15R, 5-20R
- FCC Part 15: Class B for residential

15 Amp Receptacle + 3.6 Amp USB	Description	Tamper Resistant	1-Pack UPC	10-Pack UPC	50-Pack UPC
USB2R2WH15A36	White — Standard Size Wallplate	Yes	0-42741-01536-3	1-00-42741-61536-2	1-00-42741-71536-9

20 Amp Receptacle + 3.6 Amp USB	Description	Tamper Resistant	1-Pack UPC	10-Pack UPC	50-Pack UPC
USB2R2WH20A36	White — Standard Size Wallplate	Yes	0-42741-02036-7	1-00-42741-62036-6	1-00-42741-72036-3



UL File No. E491706